



*"Leading
the Way into
the Future!"*


New Innovative Products



Our Seven Assembly Distribution Centers are Ready to Service You...

with fast service and close communication with our distributors. Hub City has seven strategically located Assembly Distribution Centers that stock and assemble hundreds of items in our complete product line, items that, in many cases, can fill your custom component needs.

Our Assembly Distribution Centers are an important link between our main manufacturing plant and our distributors.

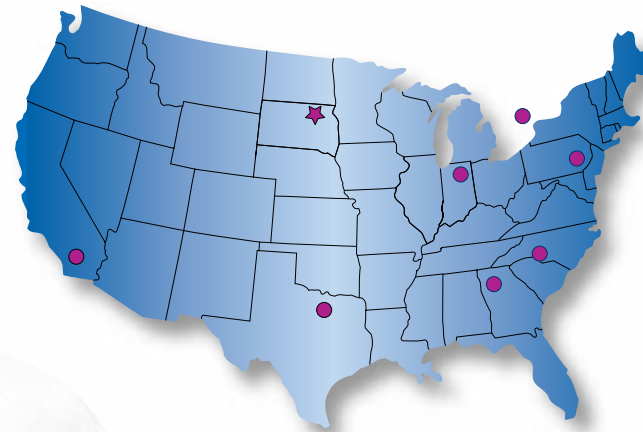

Hub City West
Assembly Distribution Center
1110 North Lemon Street
Anaheim, CA 92801
(714) 776-1992

Hub City Midwest
Assembly Distribution Center
7520 Freedom Way
Ft. Wayne, IN 46818
(219) 489-1131

Hub City Southeast
Assembly Distribution Center
135 Cecil Court
Fayetteville, GA 30214
(770) 461-8334

**Hub City Factory and
Corporate Offices**
2914 Industrial Avenue
Aberdeen, SD 57402
(605) 225-0360

Hub City Southwest
Assembly Distribution Center
3251 Royalty Row
Irving, TX 75062
(972) 721-0080

Hub City Northeast
Assembly Distribution Center
6520 Stonegate Drive
Allentown, PA 18106
(610) 391-9298

Hub City East
Assembly Distribution Center
11010 Monroe Road
Matthews, NC 28106-1415
(704) 847-9131

Hub City Canada
1111 Flint Road, Unit #16
Downsview,
Ontario, Canada M3J3C7
(416) 736-4972



A Subsidiary of Regal-Beloit Corporation

2914 Industrial Avenue, P.O. Box 1089, Aberdeen, SD 57402
(605) 225-0360 Fax (605) 225-0567

3124H - SK/4-01/3M-GL

High Efficiency Drives

Helical Bevel

Poweratio® 2000 Helical Bevel Drives



Dimensional and Mechanical
interchangeability with most
major competitors

Specifications

- Power ratings from 1/4 to 55 HP
- Output torque to 38,000 in. lbs.
- Ratios from 6:1 thru 3000:1

Features

- Shaft, C-face and gearmotor input configurations
- Foot mount, shaft mount and flange mount output configurations
- Mechanically and dimensionally interchangeable with most major competitors
- Cast iron housings, precision crowned carburized and hardened gears

Options

- Modified and custom designs
- Metric dimensions
- BISSC and washdown configurations
- Motorized versions

Mounted Bearings

Cleanline

Mounted Bearings



Premium washdown bearings
for the toughest food service
and high moisture applications

Specifications

- Cast iron flat solid base pillow blocks
- Huballoy® 2 bolt and 4 bolt flange blocks
- Wide inner ring setscrew lock inserts
- Bore sizes from 3/4" to 1-1/2."

Features

- Premium washdown design for food service and high moisture environments
- FDA approved white powder coating
- Yellow zinc chromate plated bearing insert stainless steel flingers & inner shields
- Four separate barriers against contamination: Outer flingers, nitrile inner and outer contact seals, and grease cavity
- Out performs both triple lip and labyrinth seals
- Permanently lubed with USDA H1 approved synthetic grease

Gear Drives

Motorized Worm

Right Angle Drives



Equipped with energy saving
Marathon™ motors

Specifications

- Center distances from 1.33" to 5.25"
- Shaft output, shaft mount and flange mount designs
- Single and double reduction

Features

- High efficiency Marathon™ motors
- 1/4HP thru 10HP
- Competitively priced drive package
- On the shelf availability

Options

- Helical/worm combinations
- Inverter duty and brake motors
- Modified and custom designs
- BISSC and washdown configurations

Helical In-Line

Poweratio® 2000 Helical In-line Integral Gearmotors and Model HI2092E for Expanded Capacity



Featuring advanced designs in
interchangeability

Specifications

Integral Gearmotors

- Six sizes available
- Power ratings from 1/4 to 5HP
- Ratios from 2.15:1 thru 3,716:1

Model HI2092E

- Power ratings up to 104HP
- Output torque to 23,000 in. lbs.
- Ratios from 2.24:1 to 67:1
- Motor frame sizes from 210tc to 280tc

Features

- Universal foot or flange mounting
- Mechanically and dimensionally interchangeable with most major competitors
- Cast iron housings, precision crowned carburized and hardened gears

Options

- Modified and custom designs
- Metric dimensions
- BISSC and washdown configurations
- HI2092E motorized versions 7-1/2HP thru 30HP

QuadGuard

Mounted Bearings



Designed to do your dirty
work in dusty, or high
particulate environments

Specifications

- Cast iron pillow blocks
- Huballoy® 2 bolt and 4 bolt flange blocks
- Wide inner ring eccentric lock inserts
- Bore sizes from 1" to 1-15/16"

Features

- Premium performance in dusty, dirty or high particulate environments
- Four separate barriers against contamination: Outer flingers, nitrile inner and outer contact seals, and grease cavity
- Out performs both triple lip and labyrinth seals
- Relube design is prelubricated at the factory

Options

- Nickel Plating
- Modified and custom designs

Cleanline Gear Drives

Right Angle, Parallel and Helical In-line Drives



Premium washdown gear drives
for the toughest food service and
high moisture applications

Specifications

- FDA approved white acrylic paint
- Corrosion resistant shaft treatment
- Stainless steel hardware and nameplate

Features

- Available in all drive types: Worm gear, Bevel gear, Parallel gear
- Poweratio® 2000 high efficiency drives
- Premium washdown design for food service and high moisture environments

Options

- Marathon's Powerwash TX washdown duty motors
- Stainless steel shafts
- BISSC standards
- Modified and custom designs