







Single Pitch







A-1 Attachment




K-1 Attachment




D-1 Attachment

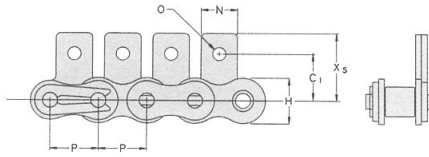

SA-1 Attachment

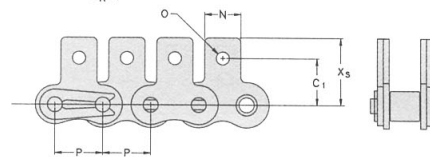

SK-1 Attachment



D-3 Attachment

STANDARD SINGLE PITCH ATTACHMENT CHAIN DIMENSIONS

Chain Number	Pitch P	Width Between Roller Link Plates W	Bushing Diameter R	Pin			Link Plate		Maximum Allowable Load (lbs.)	Approximate Weight (lbs./ft.)
				D	L ₁	L ₂	H	T		
RS25	.250	.125	.130	.090	.150	.189	.230	.030	143	0.09
RS35	.375	.188	.200	.141	.230	.270	.354	.050	342	0.22

STANDARD SINGLE PITCH ATTACHMENT CHAIN

.250" PITCH RS25

DIMENSIONS

	C	C ₁	N	O	S	X	X _s	L ₃	L ₄	Additional Weight Per Attachment (lbs.)
A-1	.281	-	.220	.134	.187	.421	-	-	-	.001
K-1	.281	-	.220	.134	.187	.421	-	-	-	.002
SA-1	-	.313	.220	.134	-	-	.459	-	-	.001
SK-1	-	.313	.220	.134	-	-	.459	-	-	.002

STANDARD SINGLE PITCH ATTACHMENT CHAIN

.375" PITCH RS35

DIMENSIONS

	C	C ₁	N	O	S	X	X _s	L ₃	L ₄	Additional Weight Per Attachment (lbs.)
A-1	.375	-	.311	.102	.250	.563	-	-	-	.002
K-1	.375	-	.311	.102	.250	.563	-	-	-	.004
SA-1	-	.375	.311	.102	-	-	.573	-	-	.002
SK-1	-	.375	.311	.102	-	-	.573	-	-	.004
D-1	-	-	-	-	-	-	-	.375	.575	.002
D-3	-	-	-	-	-	-	-	.375	.575	.004

All dimensions are in inches unless otherwise indicated.